



# 5800T

## Installation Instructions

Live Load Kit Designed by Chesterton to Fit Valtek® MK1 Control Valves

- 1. Precaution:** System should be shut down, depressurized, drained, and cool before valve is handled. Observe all plant safety requirements.
- 2. Check the condition of the valve for the following:**
  - A 10 to 32 RMS (7.5 to 24 Ra) stem finish is required.
  - The stuffing box bore should be 125 RMS (94 Ra) or better finish.
  - The stem run out should not exceed  $\pm 0.010$  TIR/FT ( $\pm 0.25$  TIR/M).
  - The Lower Stem Guide and Liner and Anti-Extrusion Spacer (washer) should be in the bottom of the stuffing box. (See *Packing Configuration*.)
3. The stuffing box must be clean, i.e. completely free of any previous packing or foreign material. The valve stem must be clean, free of nicks, scratches and burrs.
4. Verify the split carbon sleeve height provided is correct. The height of the carbon sleeve should be the calculated height. The calculated height is the difference between the stuffing box depth and the measured packing set height. The packing height is approximately four times the cross-section for the 5800T Set. Install the Split Carbon Sleeve(s) (5101) in the bottom of the stuffing box. Make sure the two halves align and are seated properly on the stuffing box bottom.
5. Carefully install wedge ring starting with an End Cap, followed by an I.D. Sealing Ring, O.D. Sealing Ring, I.D. Sealing Ring, and End Cap. (See *Packing Configuration*.)
  - a) Install rings over the valve stem by twisting slightly, never open rings with a hinge like action.
  - b) Stagger ring joints  $90^\circ$ .
  - c) Use outer most or next ring to push previously installed rings into stuffing box until all rings are in place. **DO NOT USE A TAMPING TOOL**, you may damage the sealing surface on the wedge shaped rings.
6. Gently seat the packing set with the Chesterton Tamping Tool.
7. Install the Anti-Extrusion Spacer (washer). Install the Upper Stem Guide and Liner and packing gland flange. Make sure the Upper Stem Guide enters into the stuffing box.
8. Lubricate the studs and bottom of the nuts with Chesterton recommended anti-seize compound. If a non-Live Load Kit, proceed to Step 11b. If Live Loading is used, lubricate the assembly components (Belleville springs and flat washer) with Chesterton recommended anti-seize compound. Verify the springs and flat washers are properly stacked as shown in the chart. (See *Packing Configuration*.)
9. Install the new gland studs or hex bolts. Verify the B7 studs and the 2H nuts or SAE Grade 5 hex bolts and mild steel nuts provided are of the same or better grade than the studs and nuts being replaced.
10. Install a live loading assembly on each stud. The cut away portion of the outer guide should face the stem.
- 11a. Install the two packing gland nuts. Tighten each nut until finger tight. Alternate tightening the gland nuts until the top surface of the flat washer is flush or even with the top, flat surface of the outer guide. Verify that the packing gland is square and perpendicular to the stem.
- 11b. For non-Live Loaded kits use calibrated torque wrench, alternating between bolts. Verify that the packing gland is square and perpendicular to the stem.
12. To properly consolidate the packing: Actuate the valve 10 times, retighten the packing gland nuts at the end of the last down / in-stroke. Actuate the valve 10 more times, retighten the packing gland nuts at the end of the last down / in-stroke.
13. Follow normal safety precautions when returning the valve to service.
14. It is advisable to check gland adjustment (torque/live loading) after a few hours of service. Take up as necessary.

If the valve does not actuate properly at the compressed assembly height, release all packing gland load completely. Then gradually tighten the packing gland nuts until no leakage is observed. Do not tighten to the point where the stem will not actuate. Reference the Torque and Packing Friction values in the chart if necessary.

Valtek is a trademark of Flowserve Corporation




860 Salem Street  
Groveland, Massachusetts 01834 USA  
Telephone: (781) 438-7000 • Fax: (978) 469-6528  
www.chesterton.com

© A.W. Chesterton Company, 2010. All rights reserved.  
® Registered trademark owned and licensed by  
A.W. Chesterton Company in USA and other countries.

Chesterton ISO Certifications available at [www.chesterton.com/corporate/iso](http://www.chesterton.com/corporate/iso)

# PACKING CONFIGURATION

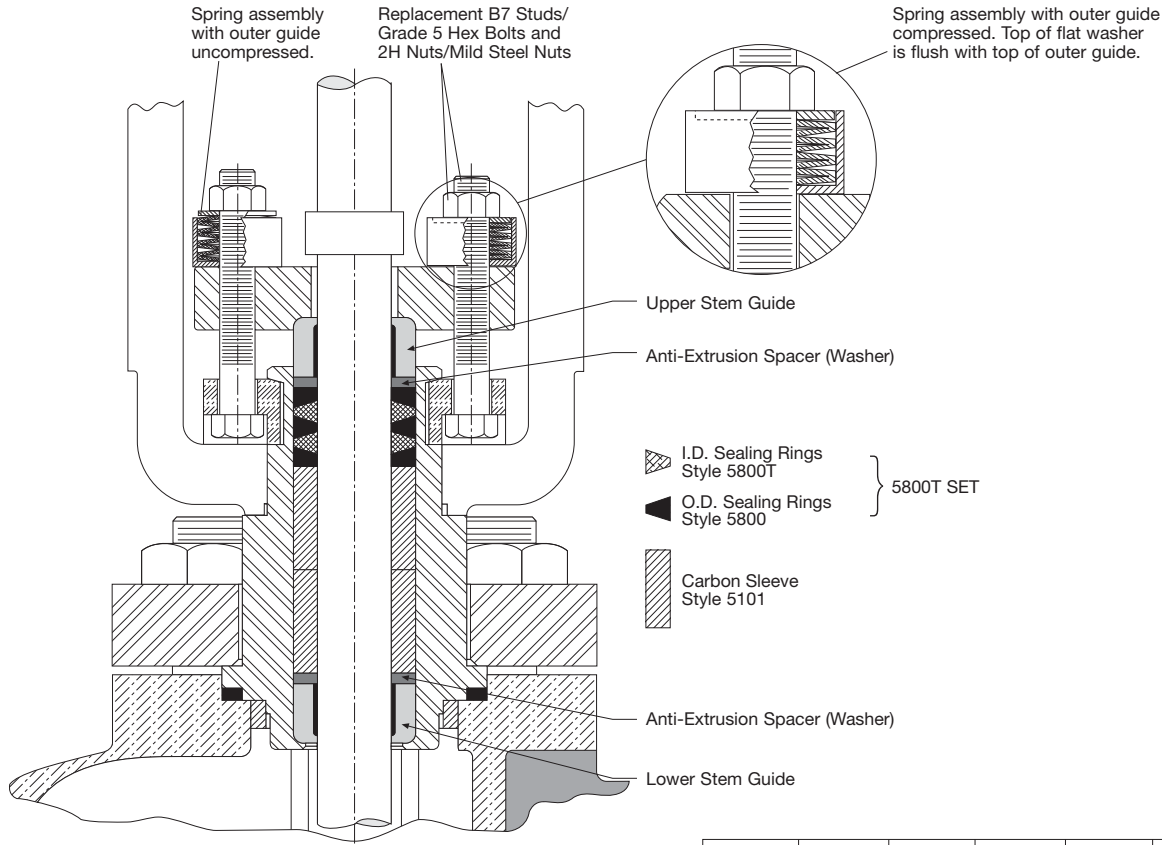

\* The stuffing box depth is measured with the lower stem guide bushing and one anti-extrusion spacer washer installed.

\*\* No Live Load Kits contain packing & bushing only.

Radial Min.	Axial Min.	Uncomp. Height	Compress. Height	Bolt Dia.	Spring Configuration	AWC Live Load Item #
0.398"	0.627"	0.622"	0.569"	0.375"	2 in par/4 in ser	024729
0.625"	0.588"	0.583"	0.475"	0.500"	4 in series	024735
0.555"	0.497"	0.492"	0.454"	0.500"	2 in par/2 in ser	024778
0.790"	0.706"	0.701"	0.593"	0.750"	4 in series	025599
0.790"	0.753"	0.748"	0.635"	0.750"	4 in series	025925
0.790"	0.954"	0.949"	0.788"	0.625"	6 in series	030718
0.790"	1.025"	1.020"	0.849"	0.625"	6 in series	031044
0.810"	0.982"	0.977"	0.810"	0.625"	8 in series	033816

## 5800T Live Load Kit Designed by Chesterton to Fit Valtek® MK1 Control Valves

BODY RATING : CLASS 150													
Spud Size	Valve/Actuator Size	Stem O.D.	Box I.D.	Bolt/Stud Dia.	Bolt/Stud Length	Box Depth*	5101 Bushing Qty. / Hgt.	Live Load Item #	Complete Kit Item #	No LL Kit Item #**	Predicted Packing Friction	Torque Ft-lbs	Torque N-M
2.00"	1/2-1" / 25/50	0.562"	1.000"	0.375"	2.750"	2.812"	1 / 1.844"	024729	148081	148192	143 lbs.	5	7
2.00"	1.5-2" / 25/50	0.875"	1.250"	0.375"	2.750"	3.531"	1 / 2.750"	024729	148082	148193	164 lbs.	5	7
2.62"	3" / 50/100	1.125"	1.625"	0.500"	3.000"	4.031"	1 / 3.000"	024735	148083	148194	166 lbs.	6	8
2.62"	4" / 50	1.125"	1.625"	0.500"	3.000"	5.343"	2 / 2.156"	024735	148084	148195	166 lbs.	6	8
2.88"	4" / 100	1.125"	1.625"	0.500"	3.500"	5.343"	2 / 2.156"	024735	148085	148196	166 lbs.	6	8
2.62"	6" / 50	1.125"	1.625"	0.500"	3.000"	6.031"	2 / 2.500"	024735	148089	148200	166 lbs.	6	8
2.88"	6" / 100	1.125"	1.625"	0.500"	3.500"	6.031"	2 / 2.500"	024735	148090	148201	166 lbs.	6	8
3.38"	6" / 300	1.125"	1.625"	n/a	n/a	6.031"	2 / 2.500"	n/a	n/a	n/a	n/a	n/a	n/a
3.38"	8" / 100	1.500"	2.000"	0.625"	6.000"	6.218"	2 / 2.578"	033816	148095	148206	215 lbs.	10	14
BODY RATING : CLASS 300													
Spud Size	Valve/Actuator Size	Stem O.D.	Box I.D.	Bolt/Stud Dia.	Bolt/Stud Length	Box Depth*	5101 Bushing Qty. / Hgt.	Live Load Item #	Complete Kit Item #	No LL Kit Item #**	Predicted Packing Friction	Torque Ft-lbs	Torque N-M
2.00"	1/2-1" / 25/50	0.562"	1.000"	0.375"	2.750"	2.812"	1 / 1.844"	024729	148081	148192	143 lbs.	5	7
2.00"	1.5-2" / 25/50	0.875"	1.250"	0.375"	2.750"	3.531"	1 / 2.750"	024729	148082	148193	164 lbs.	5	7
2.62"	3" / 50/100	1.125"	1.625"	0.500"	3.000"	4.031"	1 / 3.000"	024735	148083	148194	166 lbs.	6	8
2.62"	4" / 50	1.125"	1.625"	0.500"	3.000"	5.343"	2 / 2.156"	024735	148084	148195	166 lbs.	6	8
2.88"	4" / 100	1.125"	1.625"	0.500"	3.500"	5.343"	2 / 2.156"	024735	148085	148196	166 lbs.	6	8
n/a	6" / 50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
3.38"	6" / 100	2.000"	2.500"	0.625"	6.000"	7.032"	2 / 3.000"	030718	148091	148202	286 lbs.	13	18
3.38"	6" / 300	2.000"	2.500"	0.750"	6.000"	7.032"	2 / 3.000"	025599	148092	148203	286 lbs.	15	20
3.38"	8" / 100	2.000"	2.500"	0.625"	6.000"	7.812"	2 / 3.375"	030718	148096	148207	286 lbs.	13	18
3.38"	8" / 300	2.000"	2.500"	0.750"	6.000"	7.812"	2 / 3.375"	025599	148097	148208	286 lbs.	15	20
BODY RATING : CLASS 600													
Spud Size	Valve/Actuator Size	Stem O.D.	Box I.D.	Bolt/Stud Dia.	Bolt/Stud Length	Box Depth*	5101 Bushing Qty. / Hgt.	Live Load Item #	Complete Kit Item #	No LL Kit Item #**	Predicted Packing Friction	Torque Ft-lbs	Torque N-M
2.00"	1/2-1" / 25/50	0.562"	1.000"	0.375"	2.750"	2.812"	1 / 1.844"	024729	148081	148192	143 lbs.	5	7
2.00"	1.5-2" / 25/50	0.875"	1.250"	0.375"	2.750"	3.531"	1 / 2.750"	024729	148082	148193	164 lbs.	5	7
2.62"	3" / 50/100	1.125"	1.625"	0.500"	3.000"	4.031"	1 / 3.000"	024778	148086	148197	301 lbs.	12	16
2.62"	4" / 50	1.125"	1.625"	0.500"	3.000"	5.343"	2 / 2.156"	024778	148087	148198	301 lbs.	12	16
2.88"	4" / 100	1.125"	1.625"	0.500"	3.500"	5.343"	2 / 2.156"	024778	148088	148199	301 lbs.	12	16
n/a	6" / 50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
3.38"	6" / 100	2.000"	2.500"	0.625"	6.000"	7.032"	2 / 3.000"	031044	148093	148204	536 lbs.	24	33
3.38"	6" / 300	2.000"	2.500"	0.750"	6.000"	7.032"	2 / 3.000"	025925	148094	148205	536 lbs.	29	39
3.38"	8" / 100	2.000"	2.500"	0.625"	6.000"	7.812"	2 / 3.375"	031044	148098	148209	536 lbs.	24	33
3.38"	8" / 300	2.000"	2.500"	0.750"	6.000"	7.812"	2 / 3.375"	025925	148099	148210	536 lbs.	29	39